CRAFTGOSSIP.COM

Easy Lined Christmas Stocking

FULL-SIZE PATTERN + ASSEMBLY GUIDE

Finished size: approximately 44 cm tall x 30 cm at the widest point.
Top opening: approximately 18 cm across when flat. No separate cuff.
Includes a 1 cm seam allowance. Do not add more.

1. PRINT AND CHECK


Use A4 portrait paper. Select 100% or Actual size.
Turn off Fit, Shrink and borderless enlargement. Print this page first.
Measure the square below: it must be 5 cm wide AND 5 cm tall.

5 cm x 5 cm

TEST SQUARE

2. ASSEMBLE THE FOUR TILES

Print pages 2-5. Trim to each rectangular assembly frame, then butt the frame edges together without overlap. Tape the joins.
Match A1 to A2, B1 to B2, then the rows.
Cut the assembled solid stocking outline.

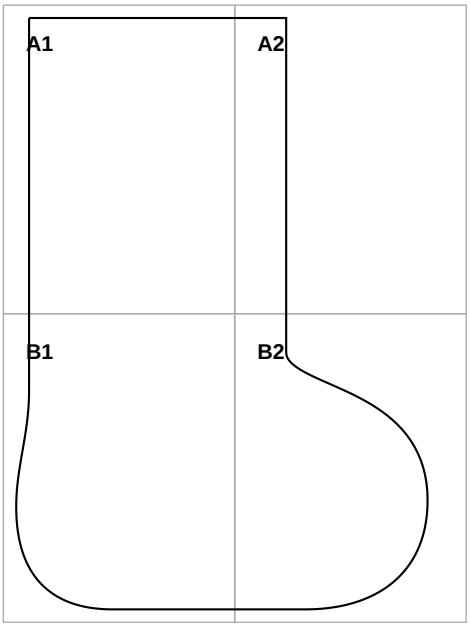

3. CUT YOUR FABRIC

Cut 2 mirrored pieces from outer fabric.
Cut 2 mirrored pieces from lining fabric.
Cut each pair right sides together.
Do not cut the stocking on a fold.
Keep grainline parallel to the selvedge.
Use 15 cm of sturdy ribbon for the loop.

PATTERN KEY


Solid outline = cutting line.
Dashed outline = 1 cm stitching guide.
Keep the top open until joining the layers.
Leave the marked 10 cm gap in lining only.
Sew the outer back seam continuously.

MATCHES THE ARTICLE METHOD

Use 50 cm x 110 cm of outer cotton and the same amount of lining.
Sew bodies, clip curves, attach loop, join top edges right sides together, and turn through the lining gap. Close gap, tuck in lining and topstitch.
Geometry checked digitally; a sewn sample has not been tested.

Pattern Tile A1


Trim to frame. Butt edges together; no overlap. Solid line = cut.

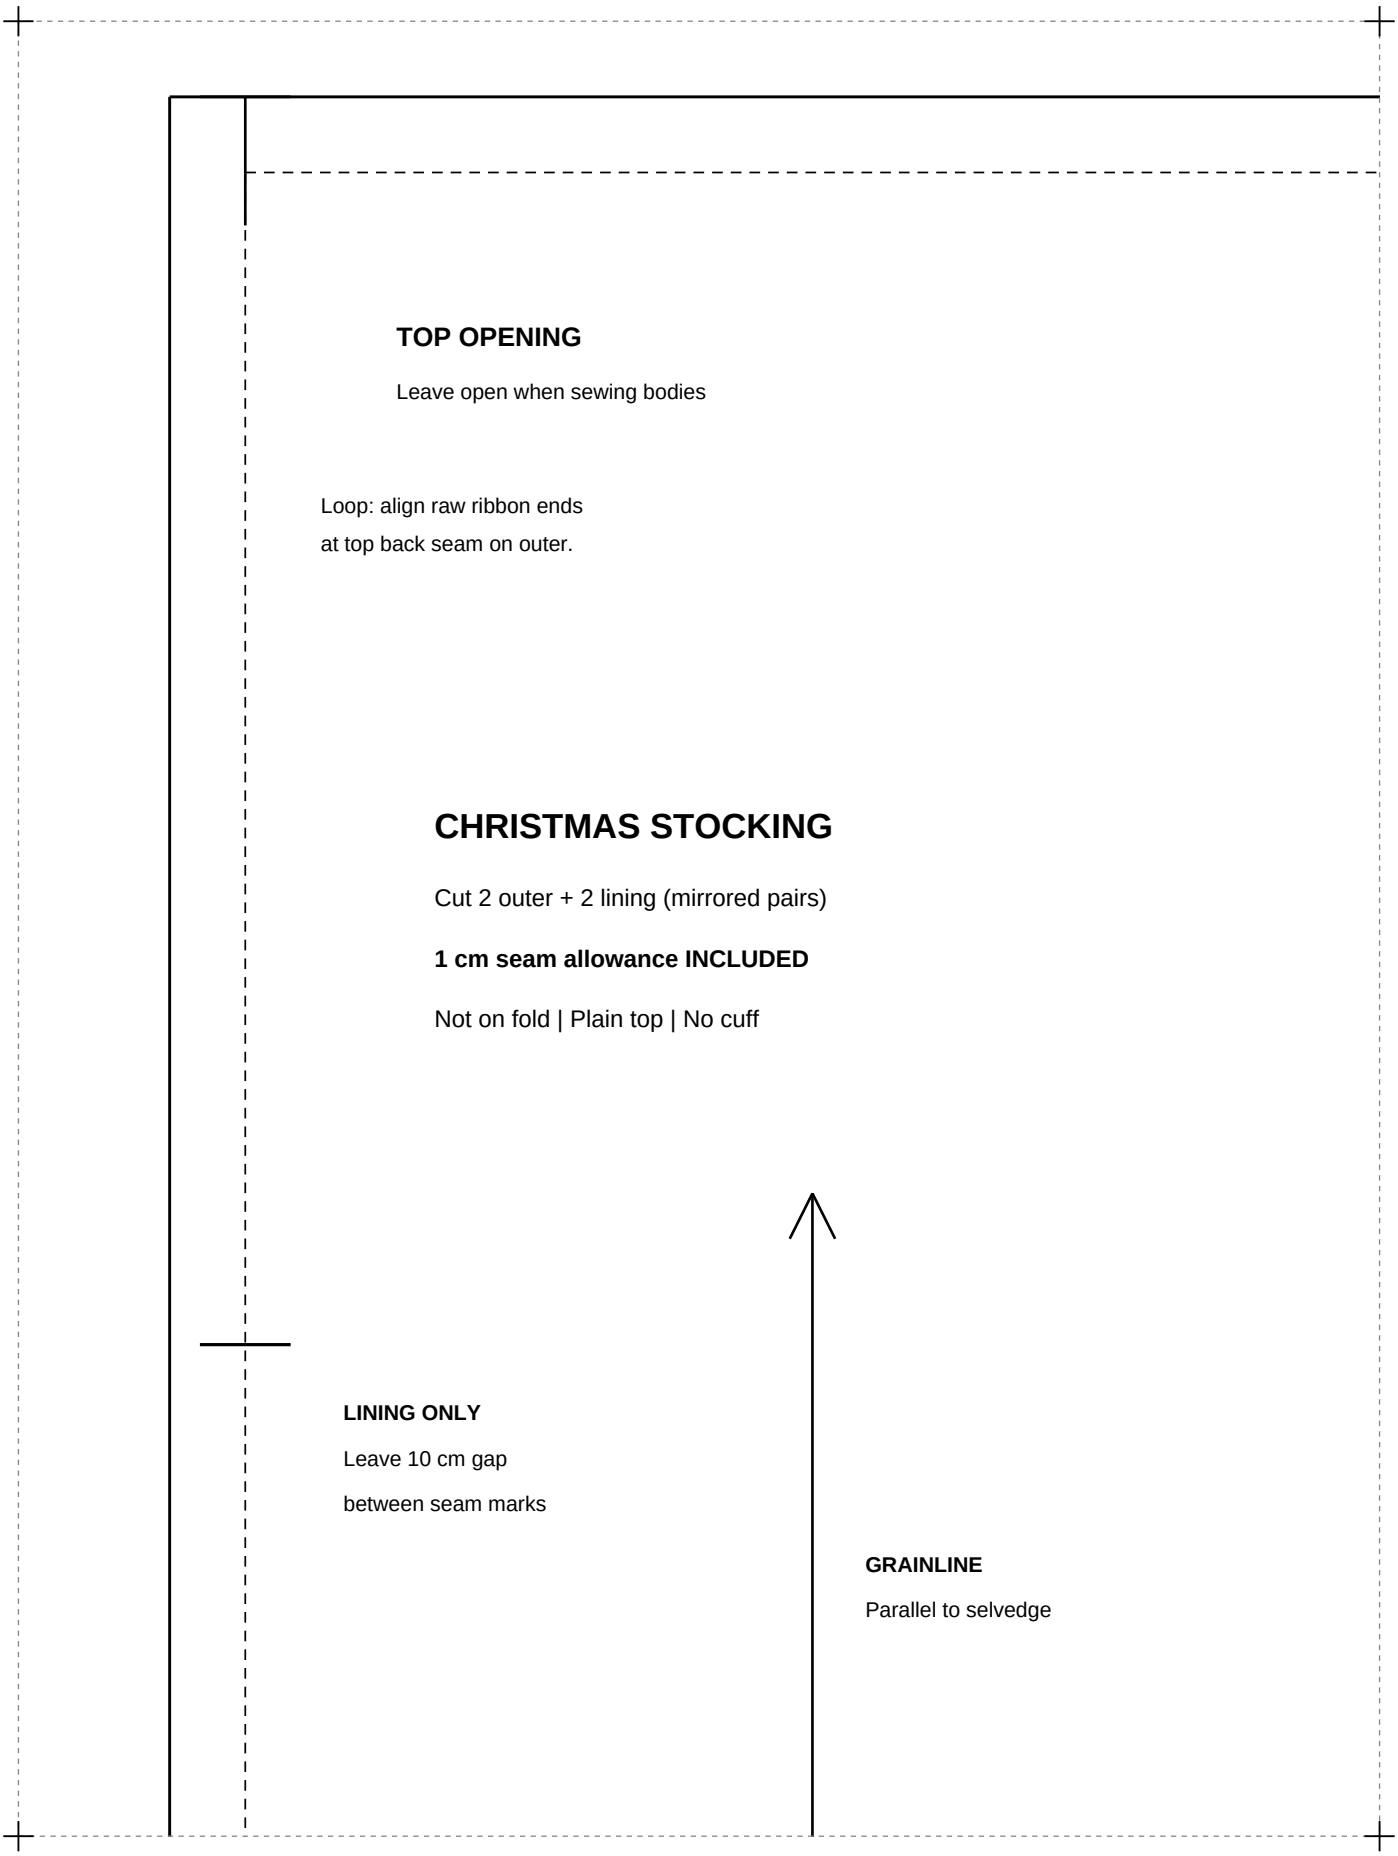

A1 | Top row | Left tile

Pattern Tile A2


Trim to frame. Butt edges together; no overlap. Solid line = cut.

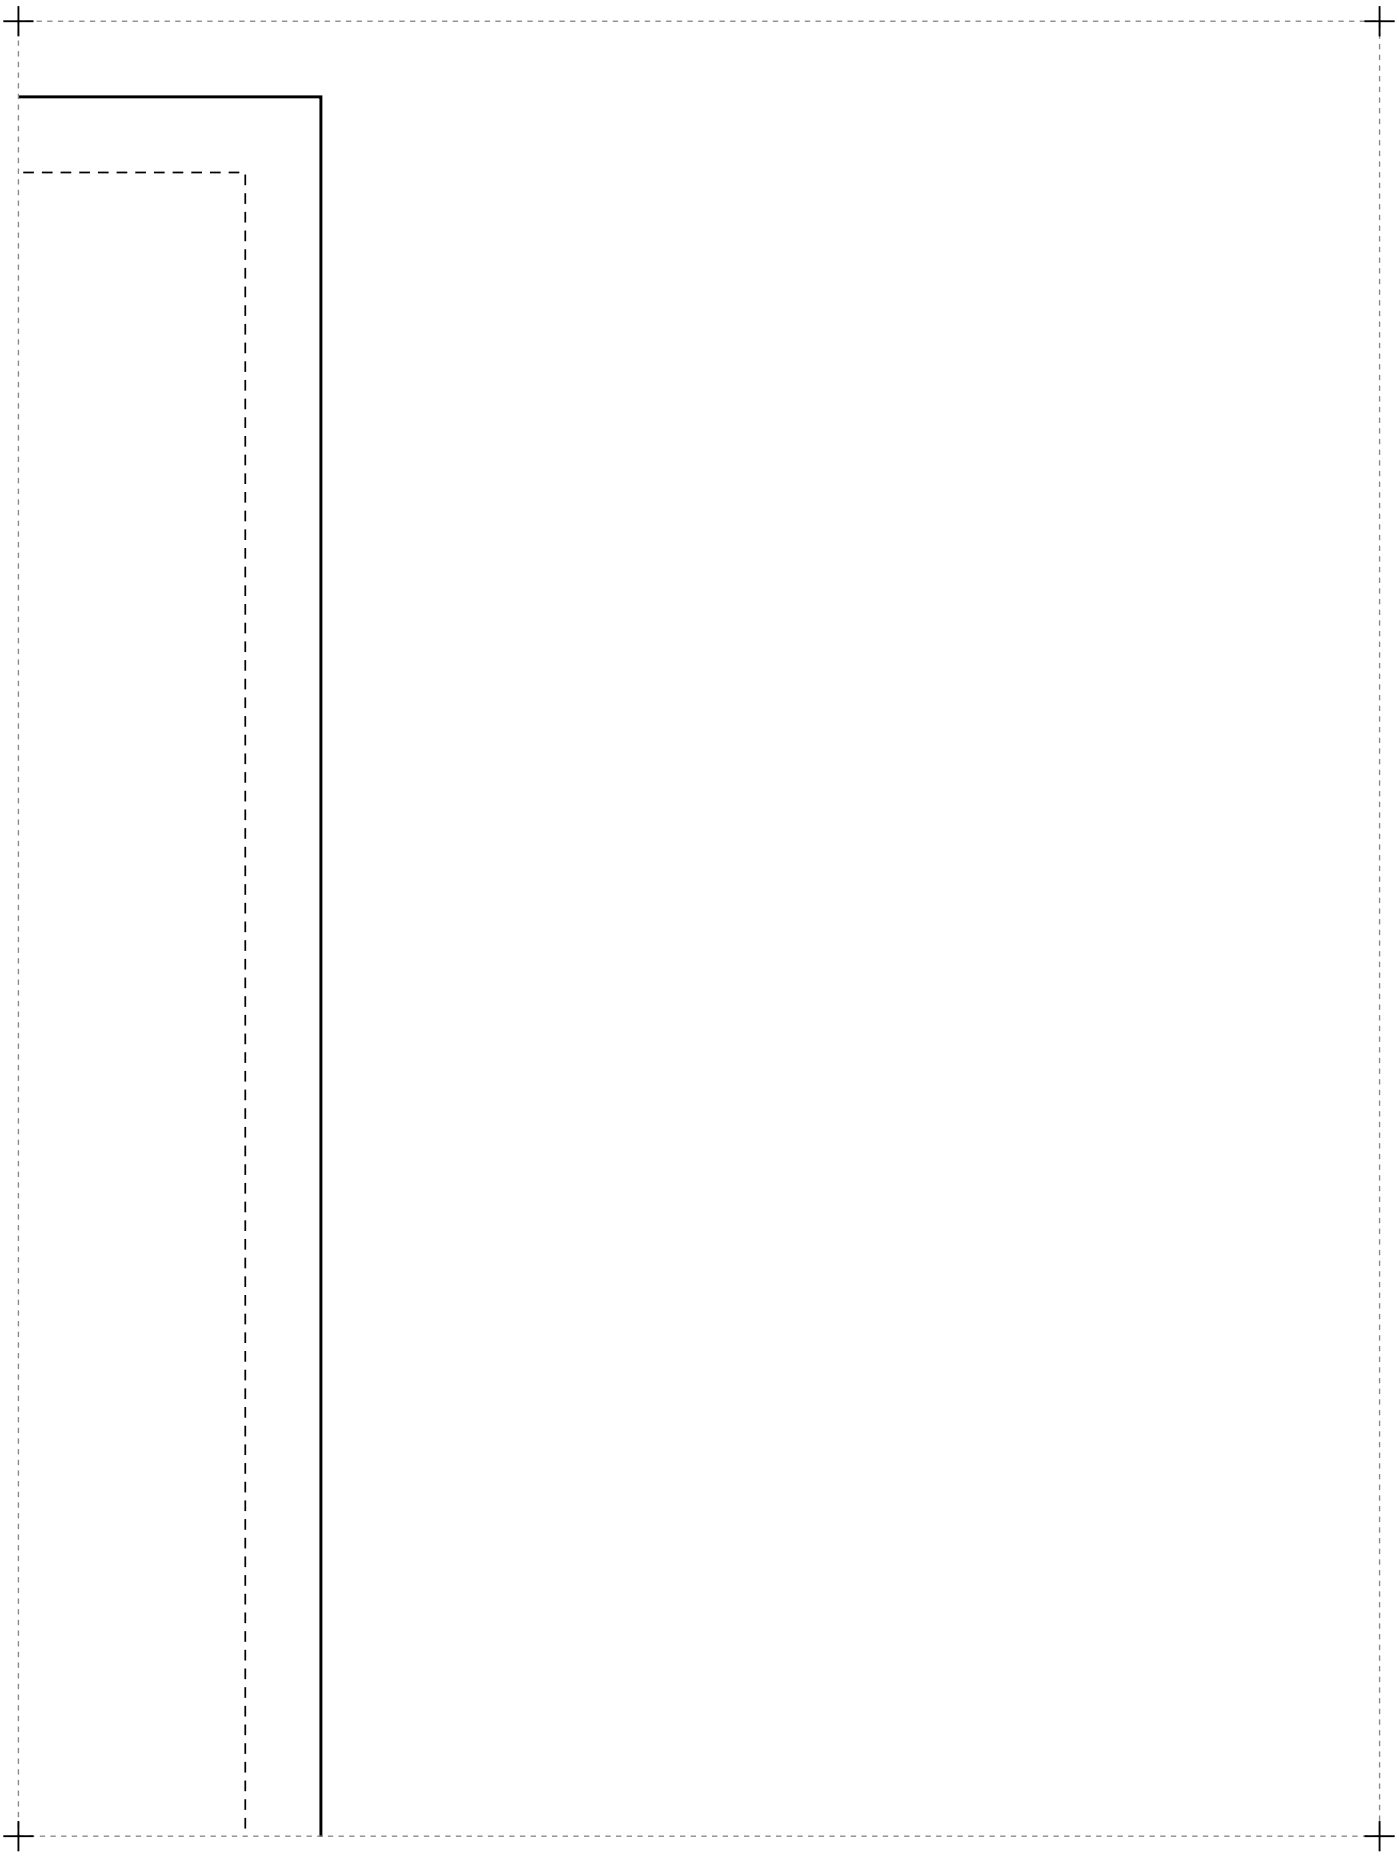

A2 | Top row | Right tile

Pattern Tile B1


Trim to frame. Butt edges together; no overlap. Solid line = cut.

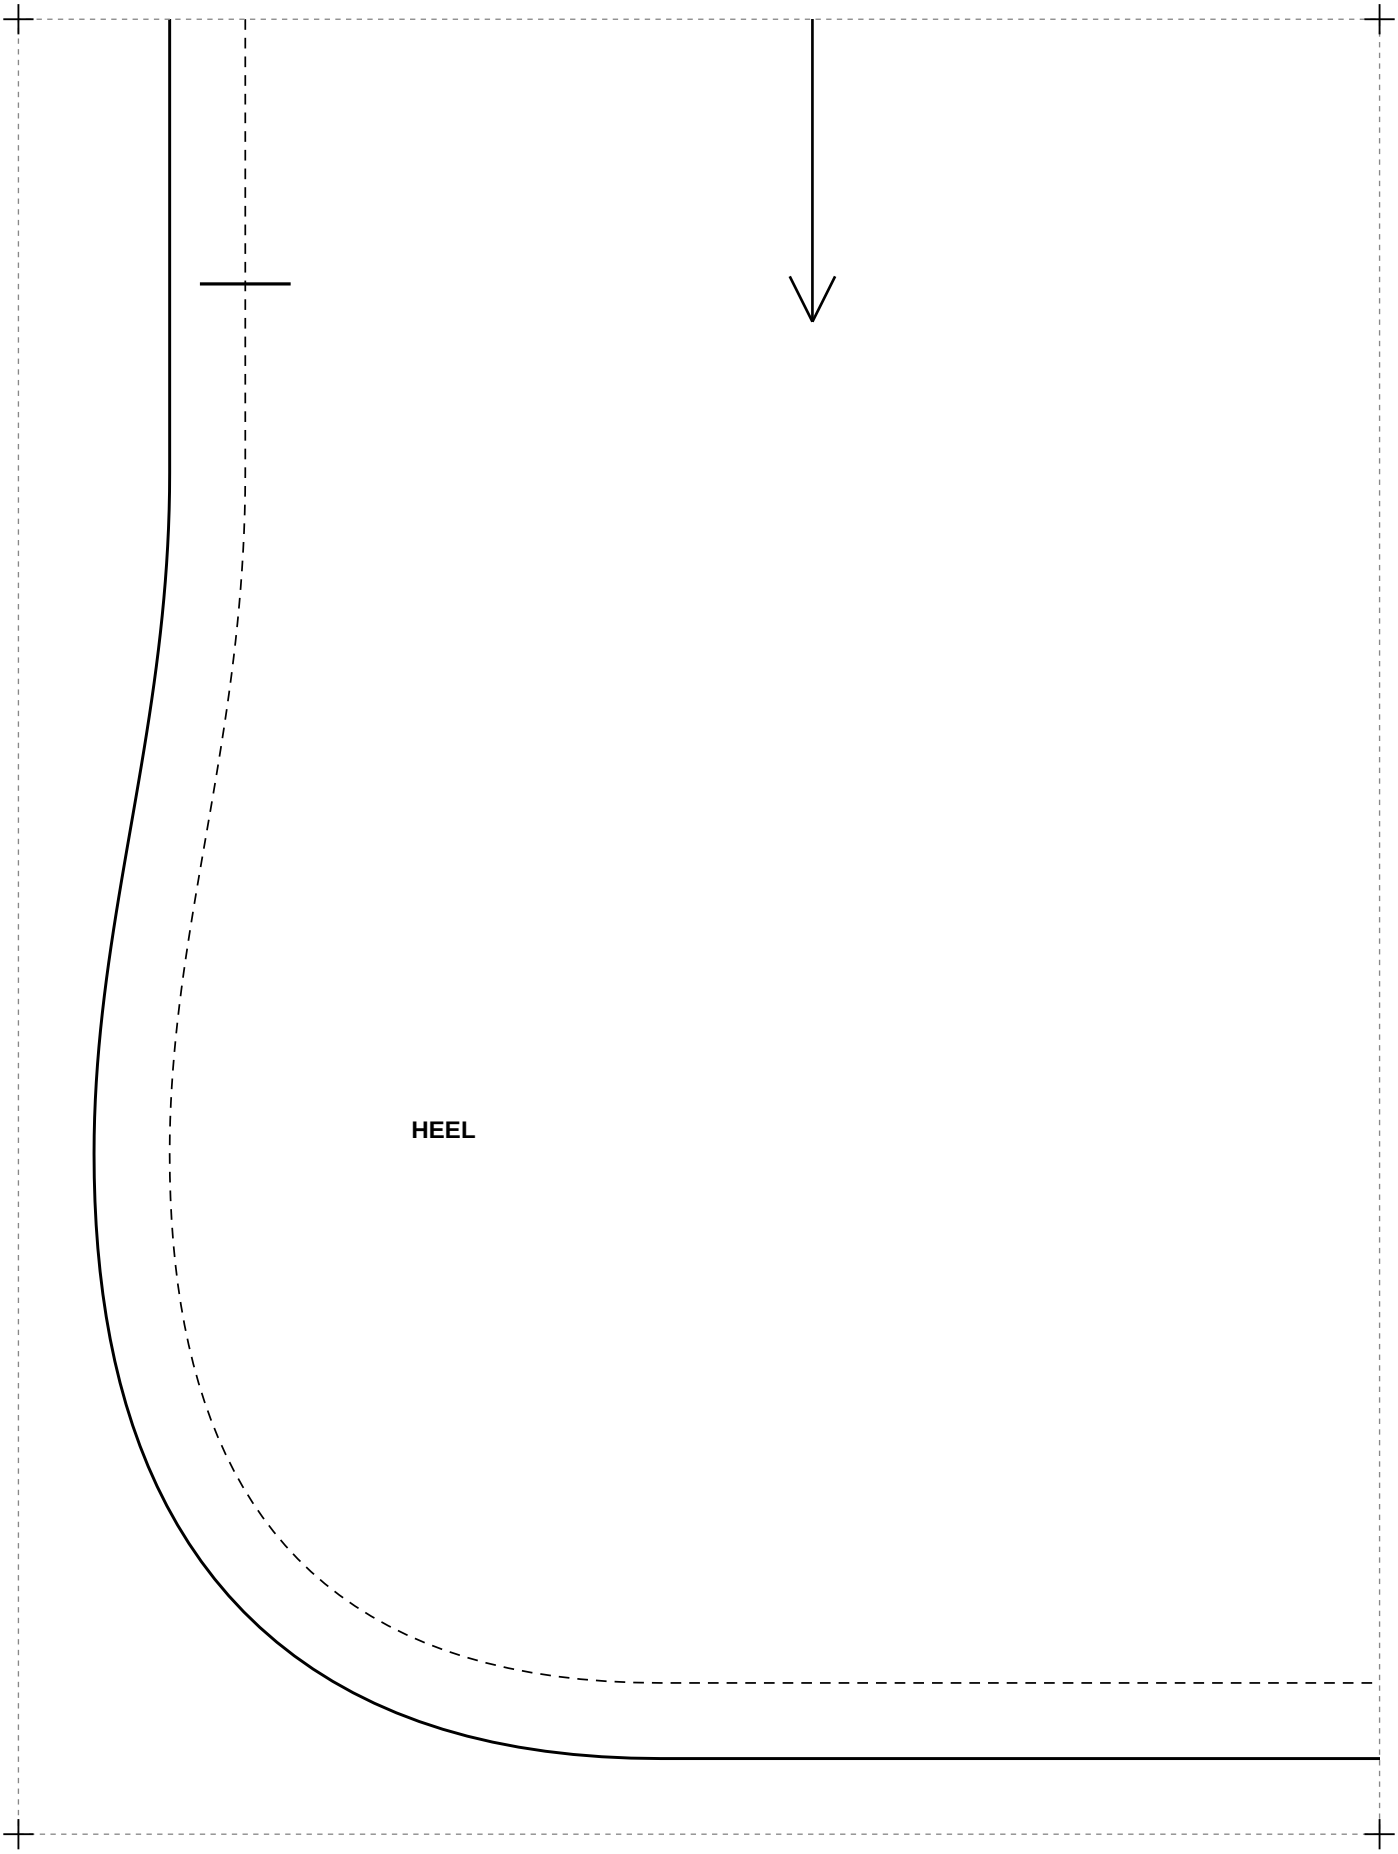

B1 | Bottom row | Left tile

Pattern Tile B2

Trim to frame. Butt edges together; no overlap. Solid line = cut.

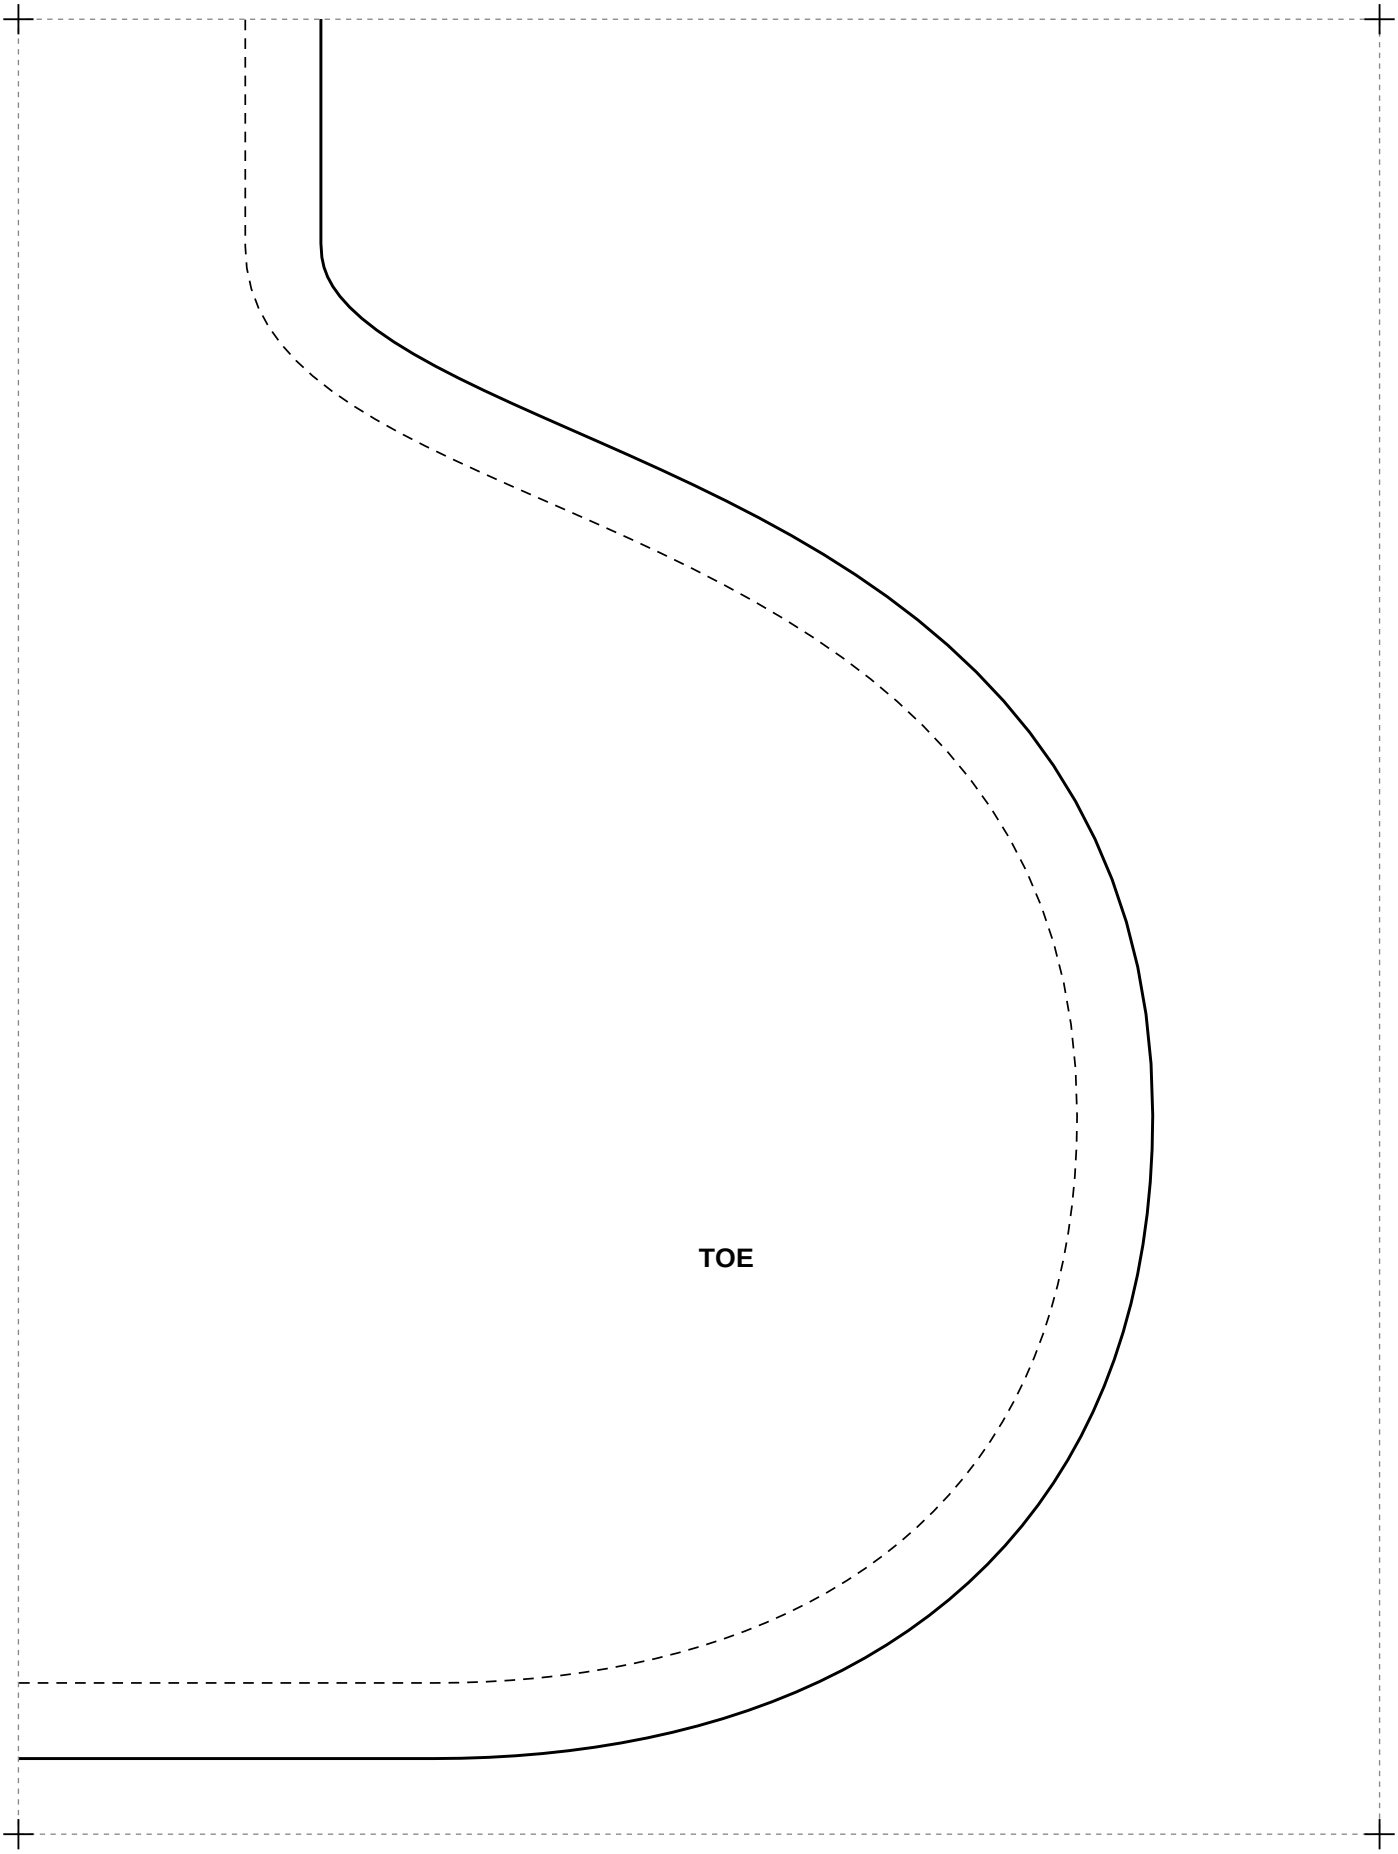

B2 | Bottom row | Right tile